

Belt scrapers




**XP3
pre
scraper**

XP3 is mounted at the conveyor at the heady pulley where the material is leaving the belt.

Delivered with tungsten carbide, ceramic or polyurethane blade.

The pivot point is not placed at the beam as general. On XP3 it is placed closer to the head pulley. That effect that the brake-down is reduced caused by that the scraper blade gap into the belt if the belt is damaged.

The leverarm can be mounted in all directions around the beam.

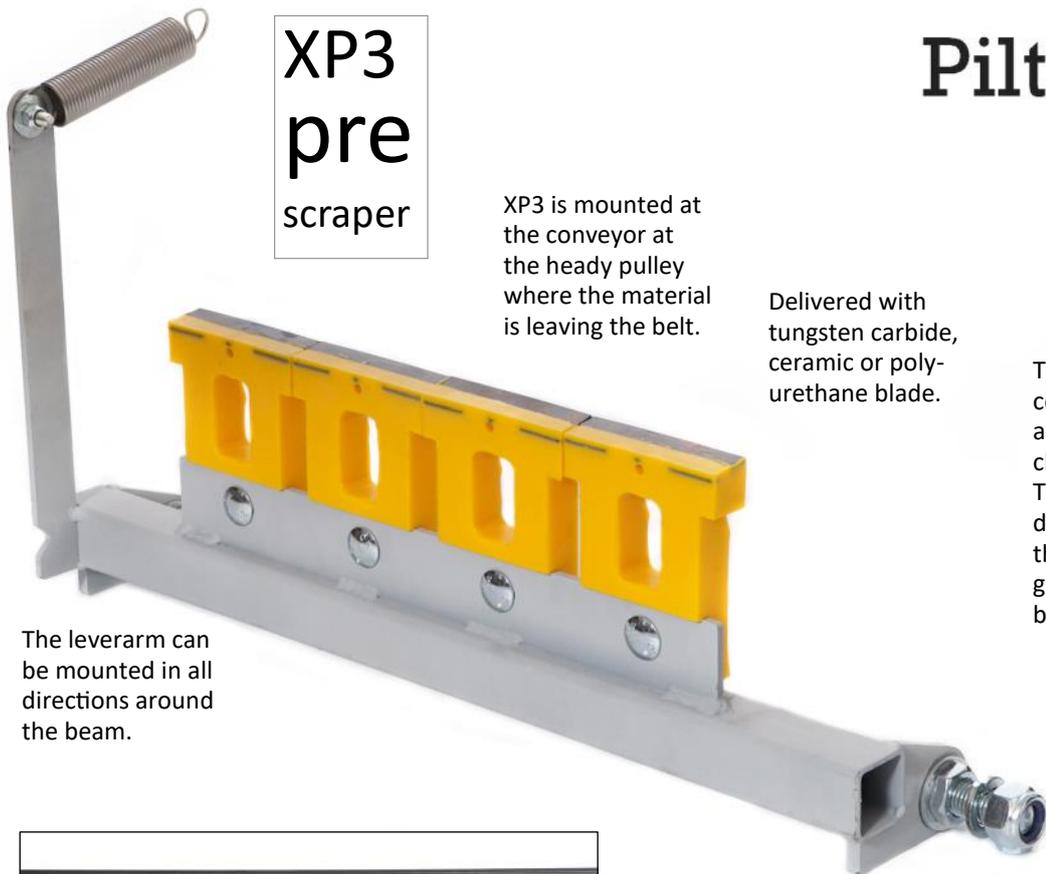

The scraper is delivered in parts.

You mount the scraper after a mounting instruction. You cut, weld and bolt the parts together to a complete scraper with your measurements. Easy to suit to your belt conveyor.



Mounting plate for XP3 with tungsten carbide – or ceramic blades.

The plates make that the scraper is perfect placed to the head pulley without measuring. Suits pulleys with $\varnothing 300$ to $\varnothing 400$ mm diameter. The two plates is temporary fixed to the beam only during the assembling.



PilthCon AB

Skånings-Åsaka,
Tyskagården 1
SE-532 96 SKARA
Ph: +46 511 290 00
www.pilthcon.se
info@pilthcon.se


XP4
scraper
board

*Longlife
tungsten
carbide or
Ceramic*

The scraper cleans the conveyor belt at the return part.

The scraper pressure is effected by how high up the scraper boards is mounted to the belt. Mount it with a low pressure at start, adjust up after need.

A tip. Replace a return idler with the XP4 at a place where the spillage is easy to take care of.

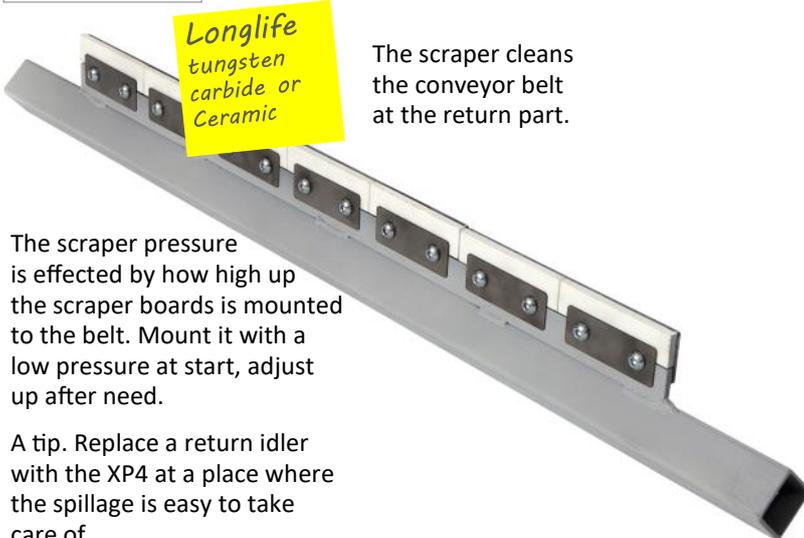

The scraper is delivered in parts.

The ground beam is not included.

You cut, weld and bolt the parts together to a scraper with right measurements. We recommend you to have in mind that the scraper can be adjusted up/down, for changing the scraper pressure.

Use a ground beam, square or round tube 40 to 50 mm. If you want, we can deliver a square tube 40x40x3 mm.

208
plough


Adjustable plough between b-w 500, 650 och 800 mm. Mounted before the tail pulley.



212
plough

Adjustable plough for b-w 1000 and 1200 mm.

XP12
scraper
board

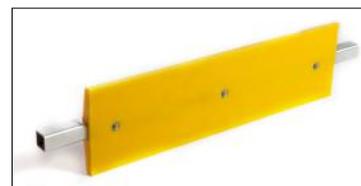

Made of polyurethane and is turnable, with scraping width 550, 700, 900 och 1100 mm.

XP12 is mounted on the return part of the belt, between two return idlers.

